

Part Number	Nominal Size HxWxD	CFM Capacity @ 300 fpm	Case Qty	Shipping Wt.
10858	12x24	600	24	19
10862	15x20	625	24	19
10865	16x20	670	24	22
10869	16x25	833	24	24
10870	18x24	900	24	26
10872	20x20	833	24	26
10874	20x24	1000	24	29
10875	20x25	1042	24	29
10877	24x24	1200	24	31
10879	25x25	1302	24	34


Characteristics	3Ply Panels/Links
Filter Media	3 layers of 100% synthetic fibers
Internal Frame	9 gauge wire
Flammability	UL900 Class 2
Recommended Final Resistance	1.0" w.g.
Maximum Temperature	120 °F
Actual Dimensions of Internal Frame	1/2" under nominal size
Air Entry	45 denier with a 15/6 denier with wet tack
Air Exit	6/3 denier

YOUR APPROVAL OF THIS PRINT AUTHORIZES FILTRATION GROUP, INC. TO PROCEED WITH MATERIAL PROCUREMENT, TOOLING AND PRODUCT FRABRICATION. ANY CHANGES MADE AFTER APPROVAL MAY INCUR FURTHER EXPENSES TO THE CUSTOMER.

For Sales Only

Customer Information: _____

 Item Number: _____

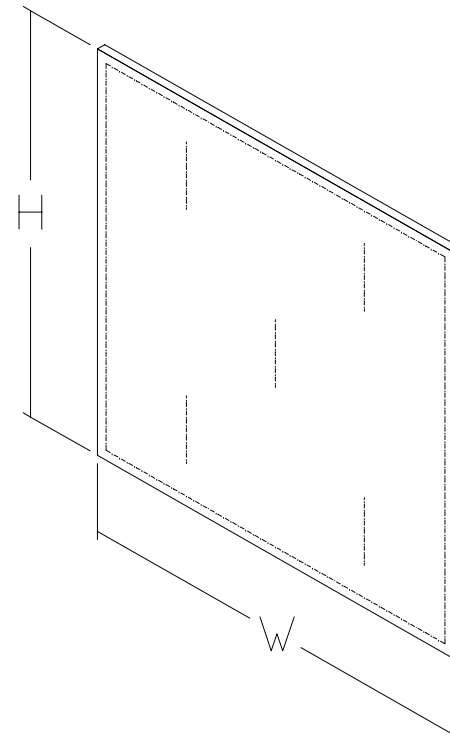

For Non-Standard Sizes, Please Consult the Factory.

_____ (A) X _____ (H) X _____ ~1/2" (D)

Please Specify Size as Nominal or Exact _____

Customer Initial and Date for Non-Standard Size _____

Filtration Group, Inc.
912 East Washington Street
Joliet, Illinois 60433

Heat Seal

3 Ply Panels/Links

DR:	AL	Date:	6/11/2002	Drawing Number:	SD-HS-3PLY	Revision:	00
CK:		Date:					