


For Sales Only

Customer Information: \_\_\_\_\_

Item Number: \_\_\_\_\_


Part Number	Nominal Size HxWxD	Actual Size HxWxD	Pleat Count	Media Area (ft <sup>2</sup> )	CFM Capacities
21261	16x20x2	15-1/2 x 19-1/2 x 1-3/4	20	10.4	1110
21262	16x24x2	15-3/8 x 23-3/8 x 1-3/4	20	12.4	1335
21263	16x25x2	15-1/2 x 24-1/2 x 1-3/4	20	12.9	1390
21267	18x25x2	17-1/2 x 24-1/2 x 1-3/4	24	14.9	1565
21268	20x20x2	19-1/2 x 19-1/2 x 1-3/4	26	12.9	1390
21269	20x24x2	19-3/8 x 23-3/8 x 1-3/4	26	15.5	1665
21270	20x25x2	19-1/2 x 24-1/2 x 1-3/4	26	16.2	1735
21271	24x24x2	23-3/8 x 23-3/8 x 1-3/4	30	18.6	2000
21272	25x25x2	24-1/2 x 24-1/2 x 1-3/4	30	20.1	2170

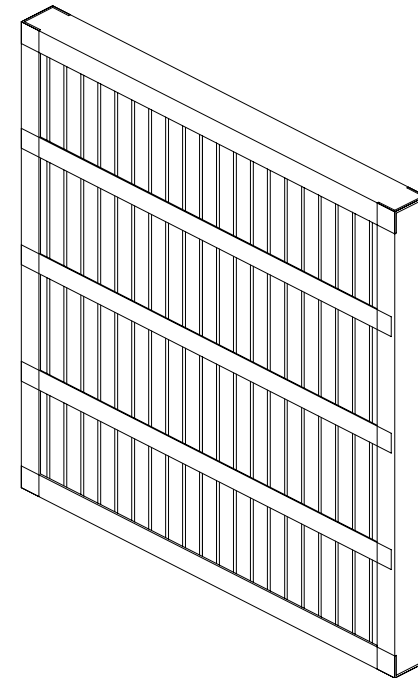

Characteristics	NOVApleat High Capacity Pleated Filter
Media	Moisture Resistant 100% Synthetic Media
Frame	Moisture resistant frame
ASHRAE Efficiency	MERV 7
Max. Temperature	150°F
Max. Humidity	100% Relative Humidity.
Flamability	UL900 Classified as to flamability Class 2 (R12347).
Height Tolerance	+0 and -1/8"
Width Tolerance	+0 and -1/8"
Depth Tolerance	± 1/16"

Filter Depth	Medium Velocity (FPM)	Initial Resistance (in. wg)	High Velocity (FPM)	Initial Resistance (in. wg)	Final Resistance* (All filters) (in. wg)
2"	300	0.16	500	0.34	1.0

\* Recommended final resistance. System may dictate a lower change-out point. (Filters tested to 1.5" wg)

				<b>Filtration Group, Inc.</b> <b>912 East Washington Street</b> <b>Joliet, Illinois 60433</b>	
				<b>AEROSTAR</b> <b>NOVApleat High Capacity</b>	
DR:	SC	Date:	3/23/2007	Drawing Number:	Revision:
CK:	PW	Date:	3/23/2007		