

Part Number	Nominal Size HxWxD	Media Area (ft <sup>2</sup> )	CFM Capacities
10367	12x24x1	3.6	1000
10380	12x24x2	6.2	1000
10393	12x24x4	11.5	1250
10375	20x20x1	5	1400
10388	20x20x2	8.8	1400
10397	20x20x4	16	1750
10416	20x24x1	6	1650
10389	20x24x2	10.6	1650
10398	20x24x4	19.2	2100
10377	24x24x1	7.2	2000
10391	24x24x2	12.4	2000
10400	24x24x4	23	2500

Characteristics	Aerostar Standard Capacity Pleated Filter
Media	Moisture Resistant 100% Synthetic Media
Frame	Moisture resistant frame
ASHRAE Efficiency	MERV 7
Max. Temperature	150°F
Max. Humidity	100% Relative Humidity.
Flamability	UL900 Classified as to flamability Class 2 (R12347).
Height Tolerance	+0 and -1/8"
Width Tolerance	+0 and -1/8"
Depth Tolerance	± 1/16"
Actual Frame Size	Please contact salesperson or customer service.


Filter Depth	Medium Velocity (FPM)	Initial Resistance (in. wg)	High Velocity (FPM)	Initial Resistance (in. wg)	Final Resistance* (All filters) (in. wg)
1"	375	0.25	500	0.37	1.0
2"	375	0.18	500	0.28	1.0
4"	500	0.25	625	0.39	1.0

\* Recommended final resistance. System may dictate a lower change-out point. (Filters tested to 1.5" wg)

For Sales Only

Customer Information: \_\_\_\_\_

Item Number: \_\_\_\_\_

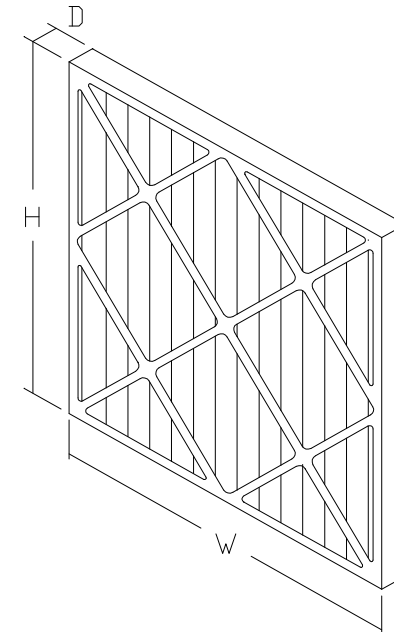

For Non-Standard Sizes, Please Consult the Factory.

\_\_\_\_\_ (H) X \_\_\_\_\_ (W) X \_\_\_\_\_ (D)

Please Specify Size as Nominal or Exact \_\_\_\_\_

Customer Initial and Date for Non-Standard Size \_\_\_\_\_



**Filtration Group, Inc.**  
**912 East Washington Street**  
**Joliet, Illinois 60433**

**AEROSTAR**

**Series 400 Standard Capacity Pleat**

DR:	SC	Date:	12/15/2005	Drawing Number:	<b>SD-SC-PLT</b>	Revision:	<b>A</b>
CK:	FH	Date:	12/29/2005				