


Part Number	Size	Actual Filter Dimensions (HxWxD)	Initial Pressure Drop w.g @ fpm			Media Area (sq. ft.)
			375	500	625	
<b>MERV 14 Box Style</b>						
21376	24x24x4	23-3/8x23-3/8x3-3/4	0.32	0.48	0.65	70
21373	24x12x4	23-3/8x11-3/8x3-3/4	0.32	0.48	0.65	35
<b>MERV 14 Headered Style</b>						
21364	24x24x4	23-3/8x23-3/8x3-3/4	0.35	0.51	0.68	67
21361	24x12x4	23-3/8x11-3/8x3-3/4	0.35	0.51	0.68	31
<b>MERV 13 Box Style</b>						
21372	24x24x4	23-3/8x23-3/8x3-3/4	0.30	0.46	0.63	55
21369	24x12x4	23-3/8x11-3/8x3-3/4	0.30	0.46	0.63	27
<b>MERV 13 Headered Style</b>						
21360	24x24x4	23-3/8x23-3/8x3-3/4	0.33	0.49	0.66	52
21357	24x12x4	23-3/8x11-3/8x3-3/4	0.33	0.49	0.66	23
<b>MERV 11 Box Style</b>						
21368	24x24x4	23-3/8x23-3/8x3-3/4	0.17	0.27	0.39	55
21365	24x12x4	23-3/8x11-3/8x3-3/4	0.17	0.27	0.39	27
<b>MERV 11 Headered Style</b>						
21356	24x24x4	23-3/8x23-3/8x3-3/4	0.20	0.30	0.42	52
21353	24x12x4	23-3/8x11-3/8x3-3/4	0.20	0.30	0.42	23

Characteristics	GeoPleat-M Filter
Media	100% Synthetic Polypropylene
Frame	22 ga. Galvanized steel - box style; 26 ga. Galvanized steel - headered style
Separators	Continuous Foamed Hot Melt
Pack Adhesive	Water-Based Glue
Max. Temperature	150°F (65°C).
Max. Humidity	100% Relative Humidity.
Flammability	UL900 Class 1
Special Features	Patented filter technology using advanced pleat geometry for maximum service life

For Sales Only

Customer Information: \_\_\_\_\_

Item Number: \_\_\_\_\_

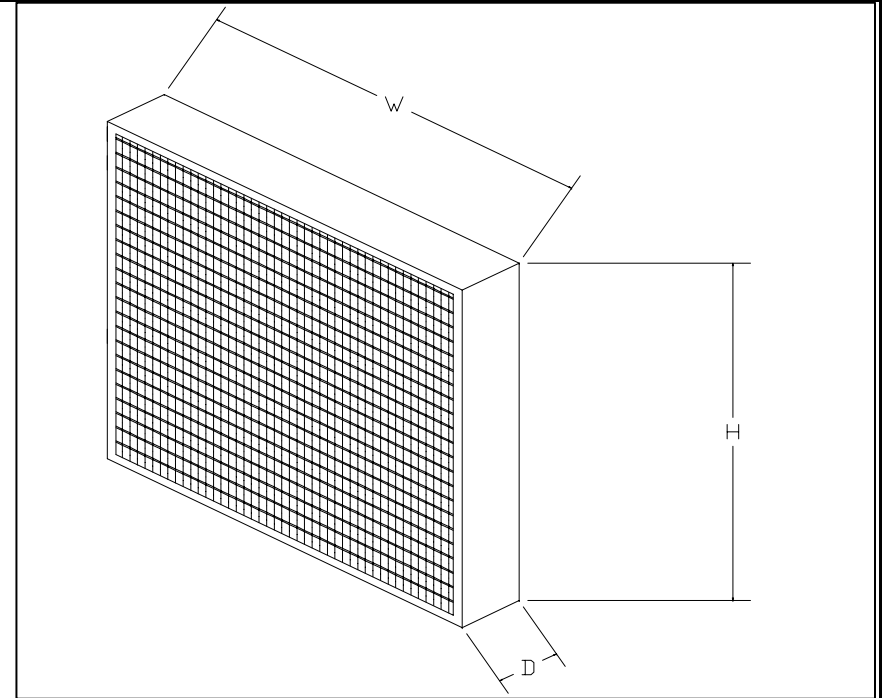

For Non-Standard Sizes, Please Consult the Factory.

\_\_\_\_\_ (H) X \_\_\_\_\_ (W) X \_\_\_\_\_ (D)

Please Specify Size as Nominal or Exact \_\_\_\_\_

Customer Initial and Date for Non-Standard Size \_\_\_\_\_



**Filtration Group, Inc.**  
**912 East Washington Street**  
**Joliet, Illinois 60433**

**AEROSTAR**

**GEOPLEAT - METAL FRAMED**

DR:	MC	Date:	5/2/2006	Drawing Number:	<b>SD-GEO-M</b>	Revision:	<b>0</b>
CK:	MC	Date:	5/2/2006				

YO

SD-GEO M